COIN MECHANISMS INC.

Where The Money Meets The Machine
817 Industrial Drive Elmhurst, Illinois 60126 - 1107

VOICE: 1-630-924-7070 1-800-323-6498 FAX: 1-630-924-7088

120 Volt AC WIRING

Wiring connections to and from ATV-3 Timer-Box when using same voltage operating the timer for the switched voltage going to your device to be timed.

Ground wire is earth ground and is shown for safety. This is optional if earth ground is supplied by other means in the application or is part of the common supply.

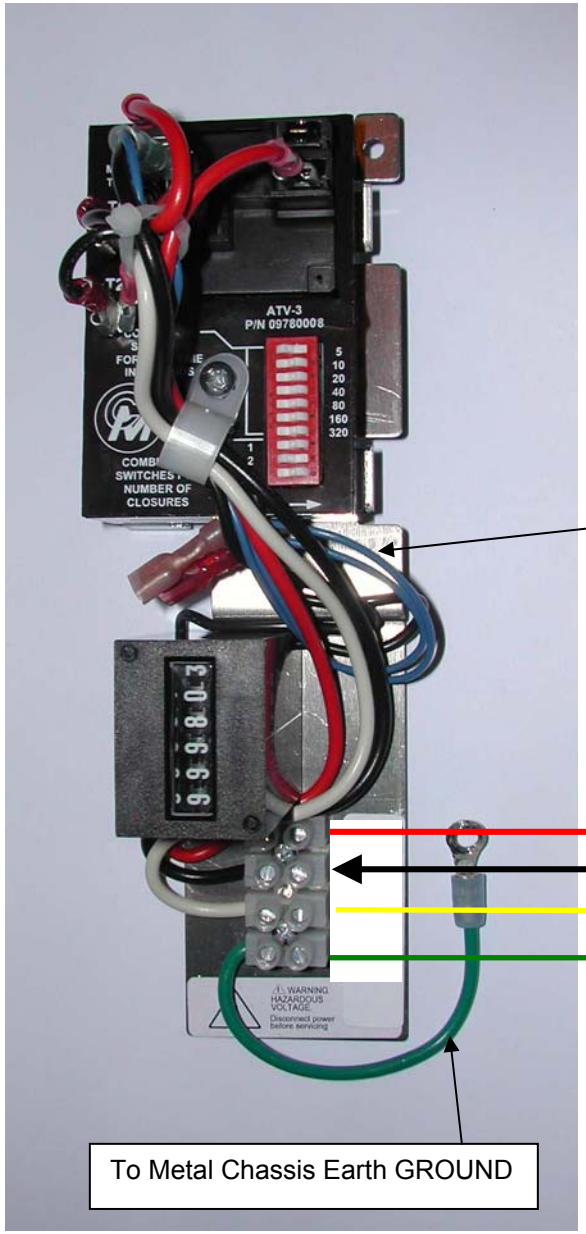

Connect these two blue wires with .187" fast-on terminals
To the Coin Micro-Switch Normally Open (NO) and COMMON (COM) terminals.
Shorting these two blue wires counts pulses for Timer.

DEVICE TO BE TIMED

120 VAC HOT (Line)
Switched output from Timer

120 VAC NEUTRAL Common

EARTH GROUND

GROUND 120 VAC NEUTRAL 120 VAC HOT (LINE)
This is your Power Source
To the Timer-Box and Device to be timed.

To Metal Chassis Earth GROUND